


1. Product Description

Rev Nov 2016

Double-sided self-adhesive tape with a PET carrier, clear modified acrylic adhesive.

2. Tape Construction

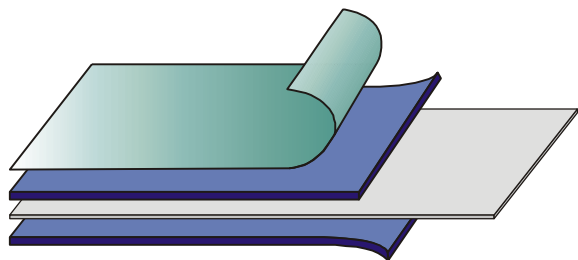

Total Thickness: 0.125mm
(excluding liner)

Amber glassine release liner 90gsm

Modified acrylic adhesive
coat weight: 56gsm

PET film: 12 micron

Modified acrylic adhesive
coat weight: 56gsm

3. Features

Will bond most surfaces, great all round performance tape. Our 427 is used to fix advertising panels, displays, banners (paper, cardboard, PVC, plastics, plexiglass, etc) even outdoor.

Permanent adhesive, high cohesion and very good ageing.

4. Product Data

Loop Tack	FINAT-9	2.0 kg / 25mm
Peel Adhesion	PSTC – 3	1.8 kg / 25mm
Shear Strength	PSTC - 7	Over 24 hrs with 2 kg loading on 25mmx 25mm at 25°C
Heat Resistance		Over 24 hrs with 0.5 kg loading on 25mm x 25mm at 80°C

Temperature Resistance: from -20°C to +180°C

Important Notice

All Fossewaytapes products are subjected to careful quality control throughout the manufacturing process and are warranted to be of merchantable quality and free from manufacturing defects. Published information concerning Fossewaytapes products is based upon research, which the Company believes to be reliable, but some information does not constitute a warranty. Because of the variety of possible uses for Fossewaytapes products and continuing development of new uses, the purchaser should carefully consider the fitness and performance of the product for each intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the purchase price of the product nor for incidental nor consequential damages. All specifications are subject to change without prior notice.