

RXT

BATTERY POWERED STRAPPING TOOL



A professional lithium-ion powered strapping tool with flexible settings, wide tension range and compatibility with PP and PET strapping






RXT

BATTERY POWERED STRAPPING TOOL

Main Features:

- > **Easy & Fast Operation**
RXT is extremely easy to operate. Single-button automatic mode completes the strapping process in less than three seconds.
- > **Digital Touch Panel**
 - > Versatile design with auto, semi-auto, manual, and soft strapping.
 - > Fast and flexible settings for operation mode, tension force and sealing time.
 - > Battery charge level and troubleshooting guides.
- > **Brushless Motor Technology**
 - > A German-manufactured brushless direct-drive DC motor provides the highest level of accuracy and reliability.
 - > This state-of-art technology results in less maintenance and longer life time of the motor.
- > **Bosch® Battery and Charger**
 - > Bosch® high capacity battery provides up to 550 strapping cycles per charge for PP and up to 320 for PET.
 - > Rechargeable Bosch® battery for up to 1,000 charges.
- > **Simple Adjustments for Different Strapping**
Only two strap guides have to be changed for applying different strap widths. The cooling time will be automatically adjusted to suit the tension.
- > **Friction Weld Sealing**
Advanced friction weld sealing technology guarantees reliable joint and high seal efficiency for both PP and PET strapping.

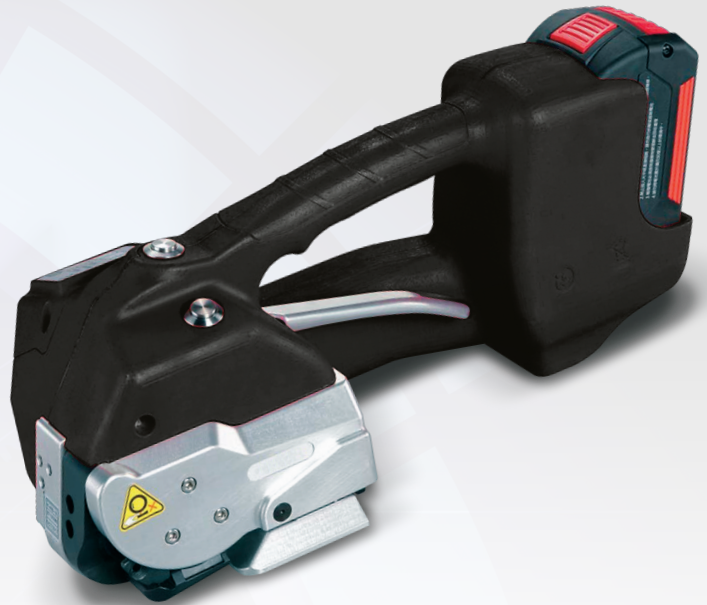

- > **Robust Housing**
Rugged construction provides outstanding impact resistance.
- > **Perfect Balance and Ergonomic Design**
Ergonomic handle with non-slip design and wellbalanced structure for easy and effortless operation.

Options:

- > Suspension bracket (static or swivel)
- > Base wear protection plate

PP Suitable for use with polypropylene strapping

PET Suitable for use with polyester strapping

Suitable for engineering industry applications

Heat weld seal - no need for metal seals

Strapping tension range up to 400kg

Suitable for brick/concrete industry applications

Battery powered

Suitable for timber industry applications

Total machine weight 4.4kg

Suitable for carton strapping applications



Digital control panel



Bosch battery & charger

Specifications

Specifications	RXT12 RXT16	RXT19
Min/Max Tension:	40-250 kg	60-400 kg
Strap Widths:	RXT12: 11 - 13mm RXT16: 15 - 16mm	16 - 19mm
Min/Max PP Thickness:	0.55mm - 1.05mm	0.75mm - 1.30mm
Min/Max PET Thickness:	0.50mm - 1.05mm	0.60mm - 1.30mm
Machine Weight:	4.3 kg	4.4 kg
Battery:	Bosch® Li-Ion 18V 4.0Ah	
Battery Charger:	Bosch® 230v (220-240v) 50/60Hz	

* Please note that the number of strapping cycles obtained from a full battery will vary depending on quality and specification of strap, length of slack taken up during tensioning, strap tension and sealing time settings, ambient conditions and operator technique.

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimax.eu.com

© Packaging Brands Ltd 2018
Optimax® is a registered trademark of Packaging Brands Ltd.
We reserve the right to change product specifications without prior notice.
Re-order Code: LIT-PSP081

